

**WICM SERIES
GAS INFRARED CHEESEMELTER****Model WICM36**

- WICM24** 24" cheesemelter broiler
- WICM36** 36" cheesemelter broiler
- WICM48** 48" cheesemelter broiler
- WICM60** 60" cheesemelter broiler
- WICM72** 72" cheesemelter broiler

STANDARD FEATURES

- Stainless steel front, top, bottom and sides.
- Welded stainless and aluminized steel chassis.
- Equipped with heavy-duty pre-mix atmospheric infrared burners.
- Standing pilot ignition system.
- Heavy-duty chrome plated grid rack and 3 position rack guide.
- Removable full width spillage pans.
- Wall mounting brackets.
- 3/4" rear gas connection and gas pressure regulator.
- One year limited parts and labor warranty.

OPTIONS

- 4" chrome plated legs with adjustable feet.

SPECIFICATIONS

Gas infrared cheesemelter, Wolf Model No._____. Stainless steel front, top, bottom and sides. Welded stainless and aluminized steel chassis. Equipped with heavy-duty pre-mix atmospheric infrared burners. Standing pilot ignition system. Heavy-duty chrome plated grid rack and 3 position rack guide. Removable full width spillage pans. Wall mounting brackets. 3/4" rear gas connection and gas pressure regulator. One year limited parts and labor warranty.

CSA Design Certified. NSF Certified.

**SPECIFY TYPE OF GAS WHEN ORDERING.
SPECIFY ALTITUDE WHEN ABOVE 3,999 FT.**

NOTE: Models are constructed standard for natural gas service. Propane conversion kit is supplied with the unit. Conversion is the customer's responsibility. Please indicate propane or natural gas when processing your order.

NOTE: Elevation orifice kit is available free of charge for high-elevation applications. Installation is the customer's responsibility. Please indicate elevation when processing your order.

WICM SERIES GAS INFRARED CHEESEMELTER

INSTALLATION REQUIREMENTS:


1. A gas pressure regulator supplied with the unit must be installed. Natural Gas 5.0" (127 mm) W.C. Propane Gas 10.0" (254 mm) W.C.
2. Gas line connecting to appliance must be 3/4" diameter or larger. If flexible connectors are used, the inside diameter must be the same as the 3/4" iron pipe.
3. An adequate ventilation system is required for Commercial Cooking Equipment (NFPA No. 96). Information may be obtained by writing to the National Fire Protection Association, Batterymarch Park, Quincy, MA 02169.
4. These units are manufactured for installation in accordance with National Fuel Gas Code, ANSI-Z223.1/NFPA #54 (latest edition). Copies may be obtained from The American Gas Association, Accredited Standards Committee Z223 @ 400 N. Capital St. NW,

Washington, DC 20001, or the Secretary Standards Council, NFPA, 1 Batterymarch Park, Quincy, MA 02169-7471.

NOTE: In The Commonwealth of Massachusetts

All gas appliances vented through ventilation hood or exhaust system equipped with a damper or with a power means of exhaust shall comply with 248 CMR.

- | 5. Clearances: | Combustible | Non-Combustible |
|----------------|-------------|-----------------|
| Rear | 2" | 0" |
| Sides | 20" | 0" |
| Bottom | 10" | 4" |
6. This appliance is manufactured for commercial installation only and is not intended for home use.

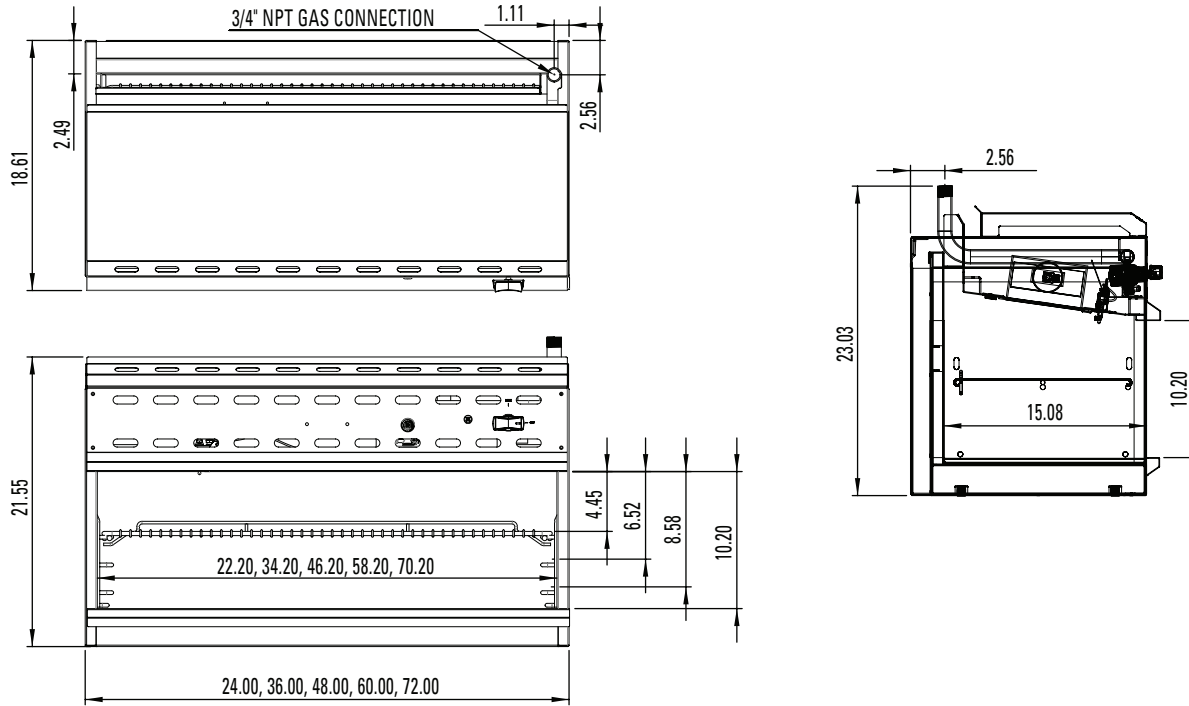

MODEL	WIDTH	DEPTH	OVERALL HEIGHT*	INTERIOR DIMENSIONS (W x D x H)	NO. OF BURNERS	TOTAL BTU/HR	NO. OF PANS	APPROX. SHIP. WT.
WICM24	24"	18.61"	23.03"	22.20" x 15.08" x 10.20"	1	20,000	1	140 lbs./64 kg
WICM36	36"	18.61"	23.03"	34.20" x 15.08" x 10.20"	1	30,000	1	185 lbs./84 kg
WICM48	48"	18.61"	23.03"	46.20" x 15.08" x 10.20"	2	40,000	2	240 lbs./109 kg
WICM60	60"	18.61"	23.03"	58.20" x 15.08" x 10.20"	2	50,000	2	285 lbs./129 kg
WICM72	72"	18.61"	23.03"	70.20" x 15.08" x 10.20"	2	60,000	2	340 lbs./154 kg

*These are nominal dimensions and can vary by +5.75" with adjustable legs.